

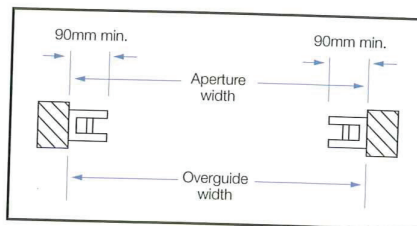
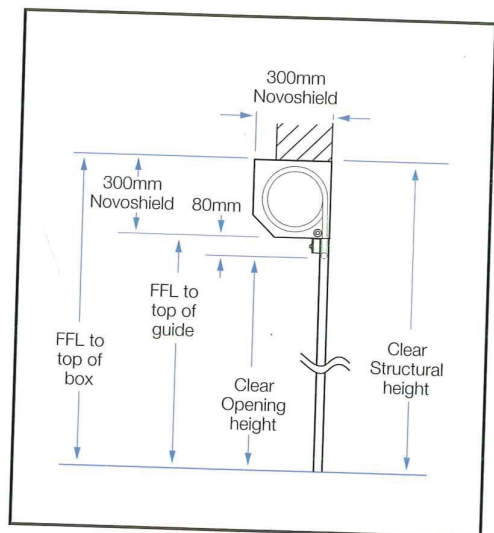



Fitting within the aperture




Fixing Options



Fitting onto the aperture

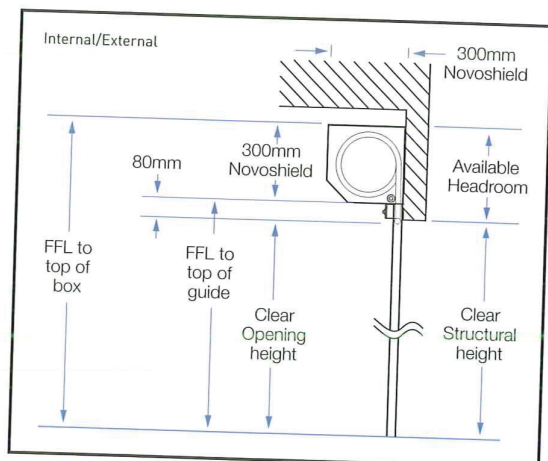

SIDE CLEARANCE: 90mm is required only if the guides are to be fully concealed. A minimum of 40mm is required to give sufficient room for fixing but a portion of the guide tracks (white as standard) will be visible.



Fixing Options

